

extensive range
leading brands
design & install

SAFE & SECURE
ONLINE SHOPPING

australia wide authorised catering equipment distributor

Visit Australia's leading Commercial Catering Equipment website for instant quotes on the major catering equipment brands at very competitive prices.

www.mvocateringsolutions.com.au

Showroom locations

MVO Services
3 Toonburra Street
Bundaberg QLD 4670
Ph (07) 4152 7277

MVO Services
5/85 Beach Road
Hervey Bay QLD 4655
Ph (07) 4194 0722

Your requested document is included below

Square Glass Refrigerated Display Bars

These units match the complete range of Square Glass Hot Food Display Bars. Together they offer a stylish visual display to enhance your product. Designed to take a variety of Gastronorm pans up to 65 mm deep. Available with cold plate cooling* or combination cold plate and cross fin coil cooling.

FEATURES

- All stainless steel construction with tubular frame
- Refrigerated cold plate and cross fin coil technology
- Quality refrigeration unit running on environmentally friendly R404A refrigerant
- Overhead fluorescent light
- Quiet operation
- Double skin construction
- Ball valve drain
- Removable cross bars
- Streamlined for easy cleaning
- Toughened safety glass front
- Rear roller doors fitted as standard



SRX25RD pictured with 65 mm pans




Adjustable digital thermostat, 0°C to 8°C



*Note: Cross fin coil units recommended at all times.

SPECIFICATIONS

MODEL	POWER Watts*	ELEC CON. Amps	DIMENSIONS w x d x h (mm)
DOUBLE ROW - COLD PLATE - INC. ROLLER DOORS			
SR22RD	480	10	705 x 620 x 750
SR23RD	480	10	1030 x 620 x 750
SR24RD	500	10	1355 x 620 x 750
SR25RD	500	10	1680 x 620 x 750
SR26RD	500	10	2005 x 620 x 750
DOUBLE ROW - COLD PLATE & CROSS FIN COIL - INC. ROLLER DOORS			
SRX23RD	480	10	1030 x 620 x 750
SRX24RD	500	10	1355 x 620 x 750
SRX25RD	640	10	1680 x 620 x 750
SRX26RD	640	10	2005 x 620 x 750

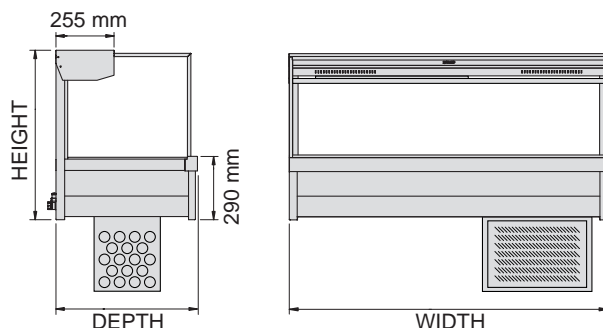

Note: For overall height dimensions, add height of motor cage (450 mm).

* Nominal ref. capacity.

Note: RD signifies roller doors included.

Optional models available - SF, SFX. These units are piped and foamed for remote installation.

Includes control panel, thermometer and light. Refrigeration unit not included.